


IMPACT SCREWDRIVERS

Yutani's impact screwdrivers are air tools which have been well-received and are widely used for fastening screws and tapping screws on automobile production lines and in many other industries. Please make your selection on the application.



Pistol-grip standard models

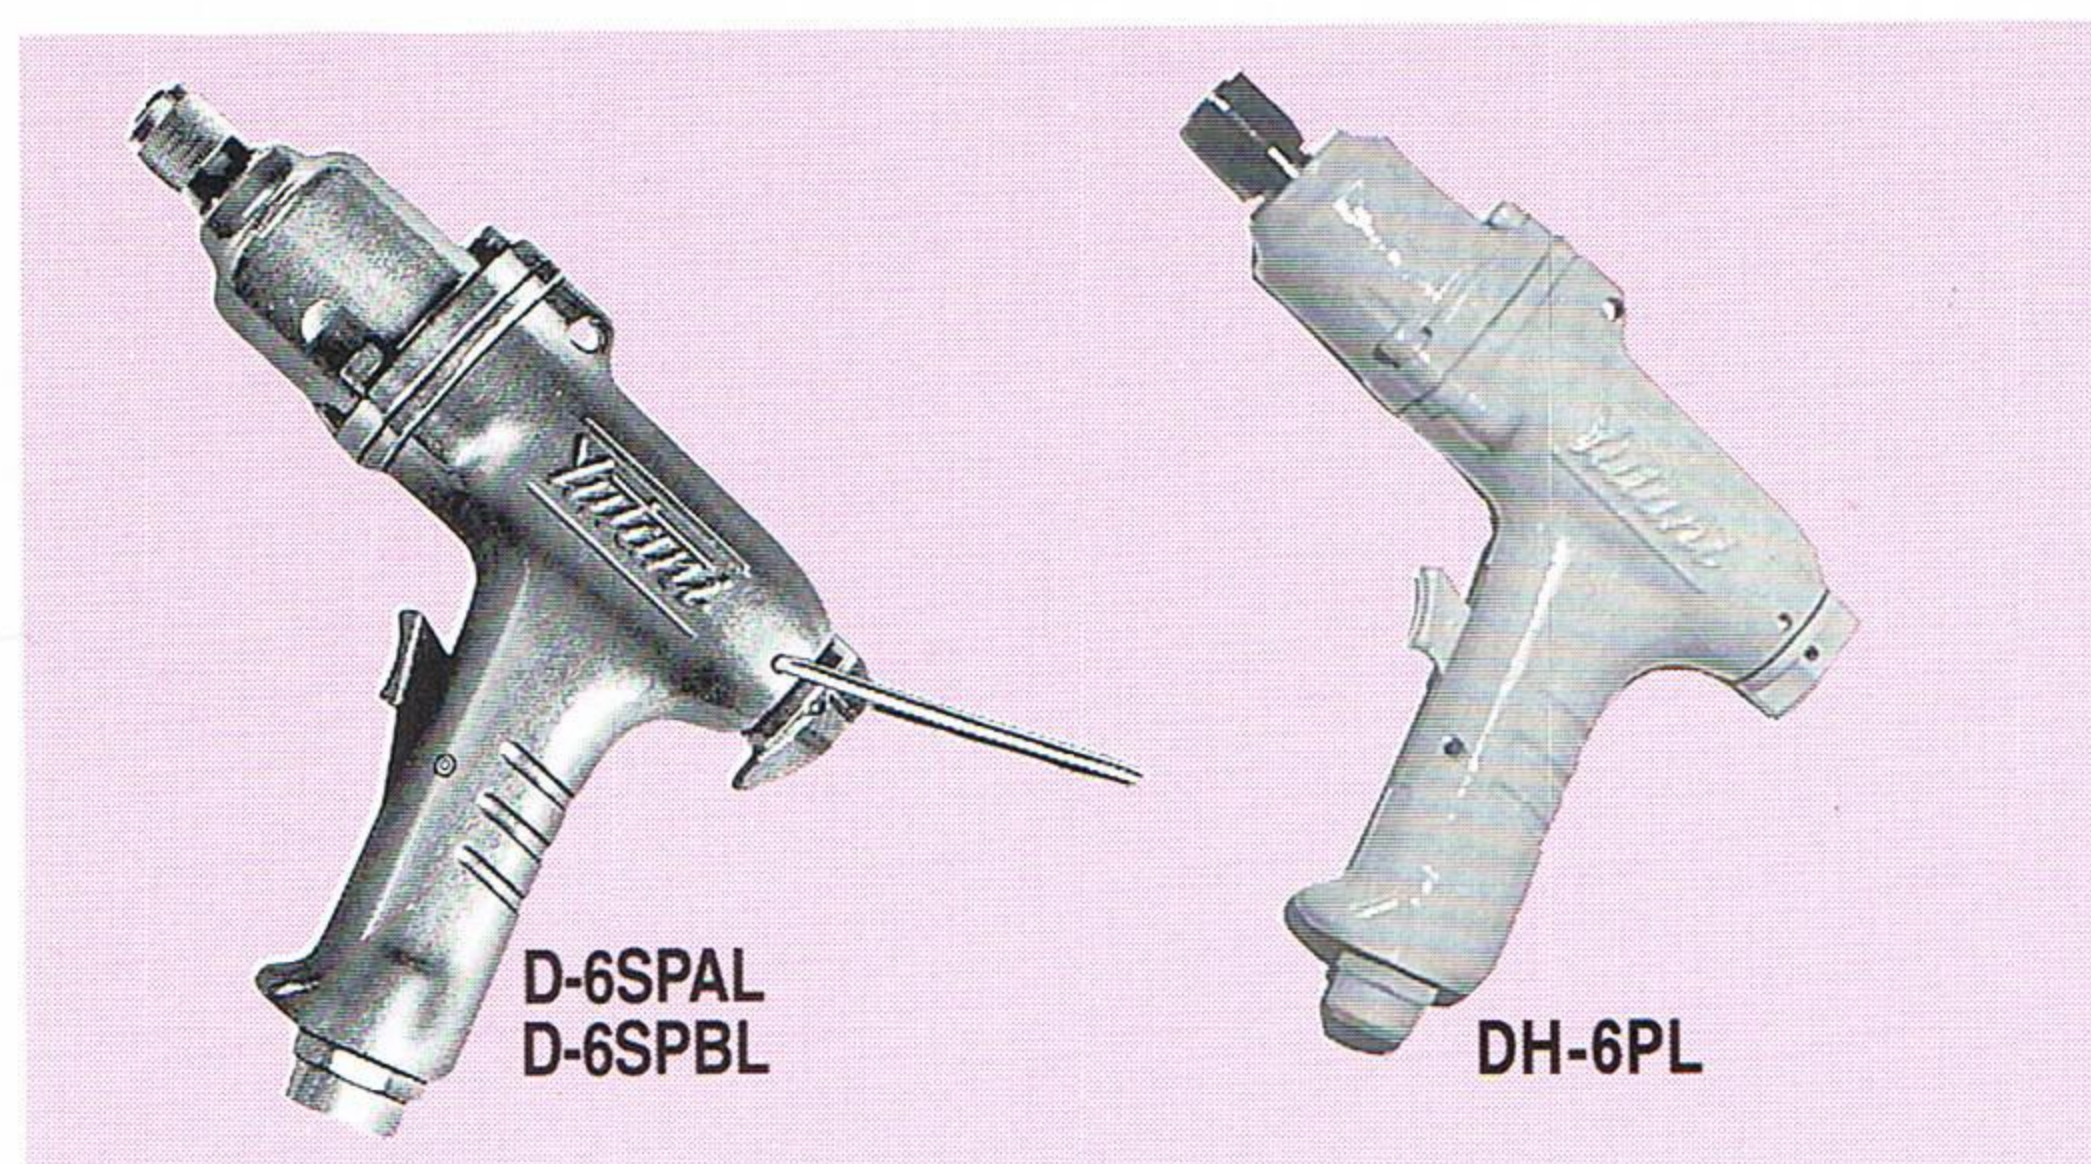


These compact, lightweight models are best sellers and have been well-received in industries which require efficient screw tightening and loosening.

- Option: A two-step rotation type (6 mm type) with low speed and high speed is available.
- Letters A and B in the model number represent the type of bit.
A: Applicable to single-end bits
B or no indication: Applicable to double-end and single-end bits

Air pressure 0.49MPa

Model	Capacity	Free speed	Weight	Overall length	Square drive size	Air inlet
	mm	rpm	kg	mm	mm	P.T
D-6SPAL	6	8,500	0.85	177	6.35	1/4
D-6SPBL	6	8,500	0.85	177	6.35	1/4
DH-6PL	6	8,500	0.9	177	6.35	1/4

Pistol-grip rear-exhaust models

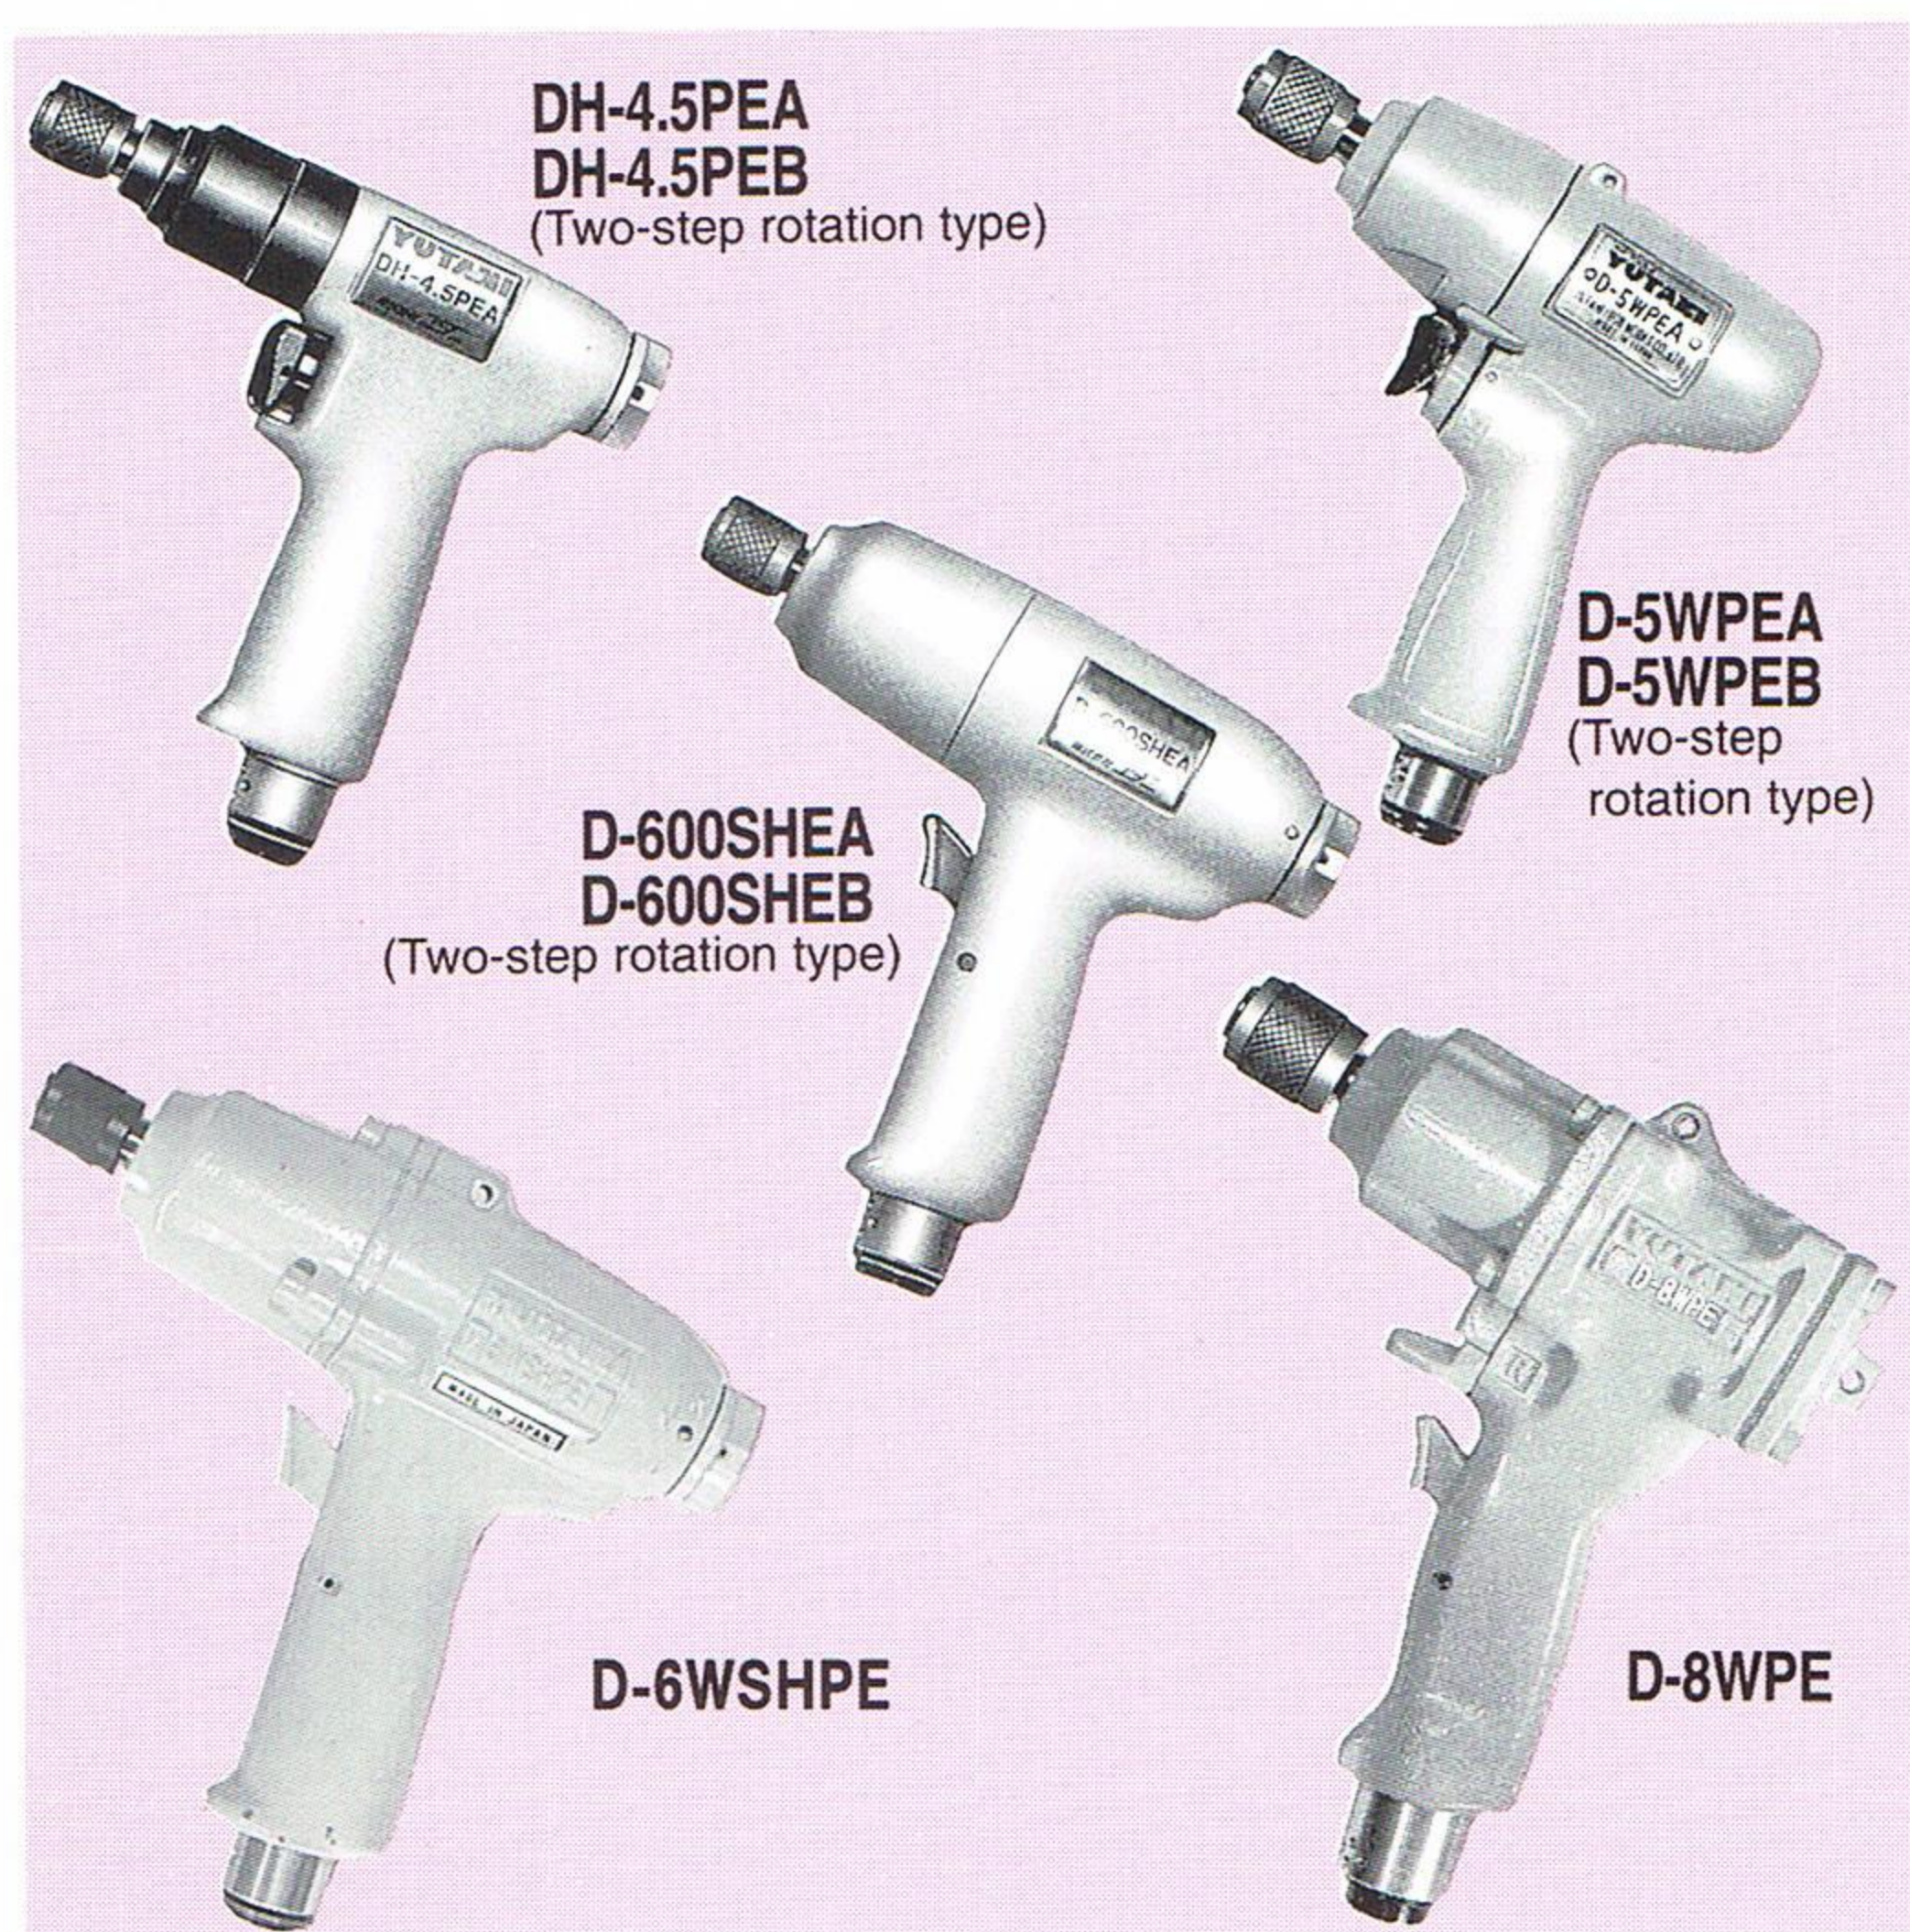

The rear exhaust direction is variable over 360 degrees, offering reduced noise and a cleaner working environment regardless of the direction of operation.

- Letters A and B in the model number represent the type of bit.

A: Applicable to single-end bits

B or no indication: Applicable to double-end and single-end bits

Models DH-4.5PE, D-5WPE, and D-600SHE feature a new screw-on case to prevent the workpiece from damage.


Air pressure 0.49MPa

Model	Capacity	Free speed	Weight	Overall length	Square drive size	Air inlet
	mm	rpm	kg	mm	mm	P.T
■ DH-4.5PEA	3.5 ~ 5	11,000	0.8	160	6.35	1/4
■ DH-4.5PEB	3.5 ~ 5	11,000	0.8	160	6.35	1/4
■ D-5WPEA	5 ~ 6	9,000	0.85	145	6.35	1/4
■ D-5WPEB	5 ~ 6	9,000	0.85	145	6.35	1/4
□ D-6SPAEL	6	8,000	0.8	177	6.35	1/4
□ D-6SPBLE	6	8,000	0.8	177	6.35	1/4
□ DH-6PLE	6	8,000	0.8	177	6.35	1/4
□ D-6WSHPE	6 ~ 8	8,000	0.9	172	6.35	1/4
■ D-600SHEA	6 ~ 8	8,000	1.0	177	6.35	1/4
■ D-600SHEB	6 ~ 8	8,000	1.0	177	6.35	1/4
■ D-8WPE	6	7,500	1.4	160	6.35	1/4

■ Two-step rotation type (standard)

□ Two-step rotation type (option)

Straight-type standard models and corner-type models

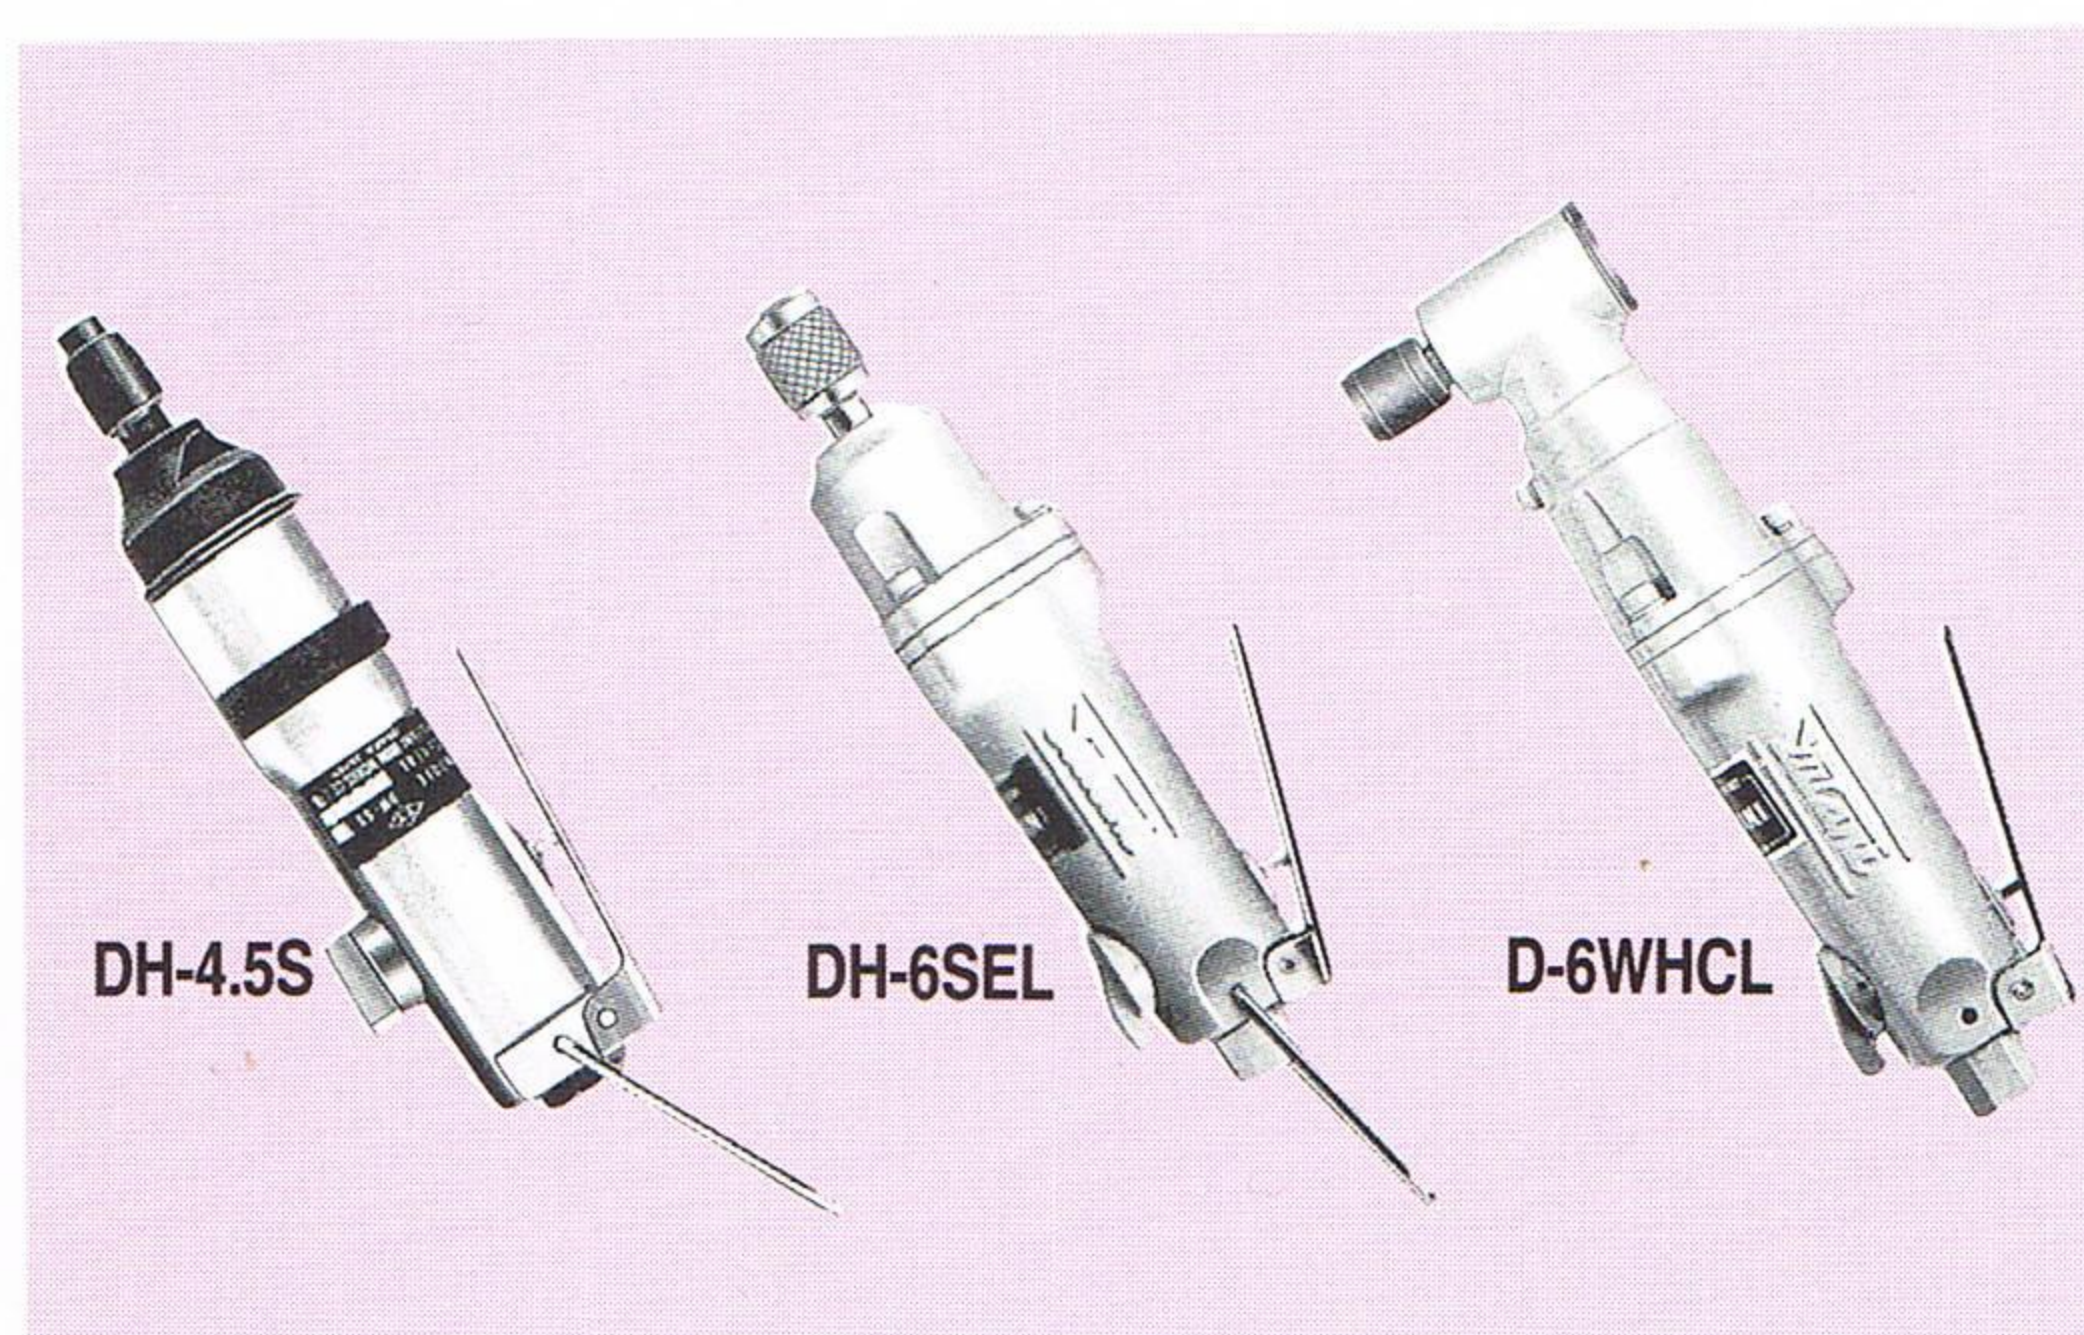

These compact, lightweight straight-type models are very easy to use in any working posture. The corner-type models are suited for jobs in narrow and confined areas where it is difficult to use the pistol-grip models and straight-type models.

Air pressure 0.49MPa

Model	Capacity	Free speed	Weight	Overall length	Square drive size	Air inlet
	mm	rpm	kg	mm	mm	P.T
DH-4.5S	3.5 ~ 5	11,000	0.6	190	6.35	1/8
D-6SSAEL	6	8,500	0.8	204	6.35	1/4
D-6SSBEL	6	8,500	0.8	204	6.35	1/4
DH-6SEL	6	8,500	0.8	205	6.35	1/4
D-6SHSL	6 ~ 8	8,000	0.9	200	6.35	1/4
□ D-6WHCL	6	7,500	1.4	229	6.35	1/4

□ Please inquire as to the date of delivery, since this varies depending on production schedules.